

ANURANG[©] Toluidine Red R 032

PRODUCTION INFORMATION

ANURANG® Fast Red R 032 is bluish shade Mono Azo pigment especially designed for decorative paints.

PRODUCTINFORMATION

| Chemical Type | Mono Azo Red | | |
|-------------------|---------------------|--|--|
| C.I.Name | Pigment Red 3 | | |
| C.I. No | 12120 | | |
| CAS NO | 2425-85-6 | | |
| EINECS /ELINCS No | 219-372-2 | | |
| PHYSICAL FORM | Free Flowing Powder | | |

APPLICATION PROFILE


| Water borne Paints | Recommended | |
|--------------------------|-------------|--|
| Air Drying Alkyds | Recommended | |
| Aqueous Pigment Emulsion | Recommended | |
| Stoving Enamels | - | |
| Powder Coating | - | |
| Industrial Coating | - | |
| Coil Coating | - | |

COLOURESTICES / FASTNESS PROPERTIES

TECHNICAL DATA

CHEMICAL STRUCTURE

| | | 1 | | |
|---------------------|-------|-----------------------|-------|--|
| FULL TONE (0.2 %) | | Reduction Tone (1:20) | | |
| | | | | |
| L | 72.83 | L | 72.79 | |
| С | 25.75 | С | 25.90 | |
| Н | 14.78 | Н | 14.94 | |
| a | 24.90 | a | 25.02 | |
| b | 6.57 | b | 6.68 | |
| Light Fastness | 6-7 | Light Fastness | 4-5 | |
| Weather Fastness | 3-4 | Weather Fastness | 2-3 | |

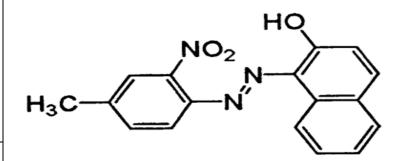

PHYSICAL DATA

| Oil Absorption | gm/100gm | 40.0-55.0 | |
|------------------|----------|-----------|--|
| Bulk Density | Kg/Lt | 0.15-0.25 | |
| Specific Gravity | Gm/cm³ | 1.40-1.45 | |
| рН | Number | 6.00-8.00 | |

SOLVENT RESISTANCE (On 1-5 Grey wool scale)

| Water | Alkali | Acid | Ethyl Acetate | Xylene | MEK | IPA |
|-------|--------|------|---------------|--------|-----|-----|
| 5 | 5 | 5 | 4 | 3 | 2 | 3 |
| | | | | | | |

STANDARD PACKAGING

| 20 Kg Plastic Bag | 42"x42" inch Wooden pallet contains 300 Kg Material. |
|-------------------|--|
|-------------------|--|

DISCLAIMER: The colour panels and other information provided in the shade card is given in good faith and is to be used as a guide only. Verification under actual conditions is recommended before use.