

## ANURANG Rubine Toner R 570

### PRODUCTION INFORMATION

**ANURANG® Fast Rubine Toner R 570** is dark bluish red shade Rubine toner especially designed for Air drying Paints.

### PRODUCT INFORMATION



<b>Chemical Type</b>	Mono Azo Rubine
<b>C.I.Name</b>	Pigment Red 57:1
<b>C.I. No</b>	15850:1
<b>CAS NO</b>	5281-04-9
<b>EINECS /ELINCS No</b>	226-109-5
<b>PHYSICAL FORM</b>	Free Flowing Powder

### APPLICATION PROFILE

Water borne Paints	-
Air Drying Alkyds	Recommended
Aqueous Pigment Emulsion	-
Stoving Enamels	-
Powder Coating	-
Industrial Coating	-
Coil Coating	-

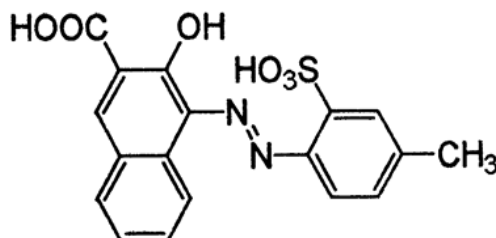
### COLOUR ESTIMATES / FASTNESS PROPERTIES

### TECHNICAL DATA

FULL TONE (0.2 % )		Reduction Tone ( 1: 20)	
			
L	32.90	L	60.49
C	38.07	C	40.55
H	22.05	H	342.98
a	35.28	a	38.77
b	14.29	b	-11.87
Light Fastness	4-5	Light Fastness	2-3
Weather Fastness	2-3	Weather Fastness	1-2

### CHEMICAL STRUCTURE

Calcium Salt of -



### PHYSICAL DATA

Oil Absorption	gm/100gm	45.0-65.0
Bulk Density	Kg/Lt	0.20-0.30
Specific Gravity	Gm/cm <sup>3</sup>	1.45-1.70
pH	Number	6.00-8.00

### SOLVENT RESISTANCE (On 1-5 Grey wool scale)

Water	Alkali	Acid	Ethyl Acetate	Xylene	MEK	IPA
5	2	2	3	4	4	3

### STANDARD PACKAGING

20 Kg Plastic Bag	42"x42" inch Wooden pallet contains 300 Kg Material.
-------------------	--

**DISCLAIMER:** The colour panels and other information provided in the shade card is given in good faith and is to be used as a guide only. Verification under actual conditions is recommended before use.