

ANURANG Rubine Toner 579

PRODUCTION INFORMATION

ANURANG® Fast Rubine Toner R 579 is yellowish red shade Rubine toner especially designed for Air drying Paints and powder coating segment.

PRODUCT INFORMATION

Chemical Type	Mono Azo Rubine
C.I.Name	Pigment Red 57:1
C.I. No	15850:1
CAS NO	5281-04-9
EINECS /ELINCS No	226-109-5
PHYSICAL FORM	Free Flowing Powder

APPLICATION PROFILE

Water borne Paints	
Air Drying Alkyds	Recommended
Aqueous Pigment Emulsion	-
Stoving Enamels	-
Powder Coating	Recommended
Industrial Coating	Recommended
Coil Coating	-


COLOUR ESTIMATES / FASTNESS PROPERTIES

TECHNICAL DATA

FULL TONE (0.2 %)		Reduction Tone (1: 20)	
			
L	34.52	L	66.84
C	38.85	C	34.70
H	26.23	H	344.87
a	34.86	a	33.50
b	17.17	b	- 9.06
Light Fastness	4-5	Light Fastness	4-5
Weather Fastness	2-3	Weather Fastness	1-2

CHEMICAL STRUCTURE

Calcium Salt of -

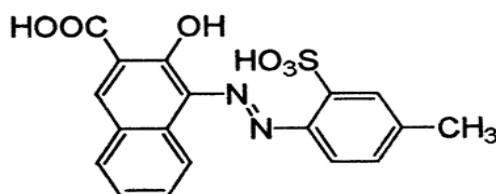

PHYSICAL DATA

Oil Absorption	gm/100gm	45.0-65.0
Bulk Density	Kg/Lt	0.20-0.30
Specific Gravity	Gm/cm ³	1.50-1.70
pH	Number	6.00-8.00

SOLVENT RESISTANCE (On 1-5 Grey wool scale)

Water	Alkali	Acid	Ethyl Acetate	Xylene	MEK	IPA
5	2	2	3	4	4	3

STANDARD PACKAGING

20 Kg Plastic Bag	42"x42" inch Wooden pallet contains 300 Kg Material.
-------------------	--

DISCLAIMER: The colour panels and other information provided in the shade card are given in good faith and are to be used as a guide only. Verification under actual conditions is recommended before use.