

## ANURANG<sup>®</sup> Maroon Toner R631

### PRODUCTION INFORMATION

**ANURANG<sup>®</sup> Fast Maroon Toner R631** is bluish red shade Maroon toner having Calcium lake, especially designed for Air drying Paints.

### PRODUCT INFORMATION



<b>Chemical Type</b>	Mono Azo Maroon Toner
<b>C.I.Name</b>	Pigment Red 63:1
<b>C.I. No</b>	15880:1
<b>CAS NO</b>	6417-83-0
<b>EINECS /ELINCS No</b>	229-142-3
<b>PHYSICAL FORM</b>	Free Flowing Powder

### APPLICATION PROFILE

Water borne Paints	-
Air Drying Alkyds	Recommended
Aqueous Pigment Emulsion	-
Stoving Enamels	-
Powder Coating	-
Industrial Coating	-
Coil Coating	-

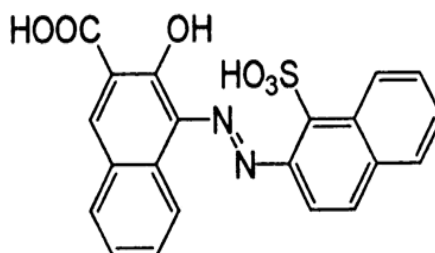
### COLOURESTICES / FASTNESS PROPERTIES

### TECHNICAL DATA

FULL TONE (0.2 % )		Reduction Tone ( 1: 20)	
			
L	31.70	L	58.99
C	34.77	C	37.04
H	20.65	H	339.13
a	32.54	a	34.61
b	12.26	b	-13.20
Light Fastness	5-6	Light Fastness	1-2
Weather Fastness	2-3	Weather Fastness	1-2

### CHEMICAL STRUCTURE

Calcium Salt of -



### PHYSICAL DATA

Oil Absorption	gm/100gm	45.0-65.0
Bulk Density	Kg/Lt	0.20-0.30
Specific Gravity	Gm/cm <sup>3</sup>	1.40-1.55
pH	Number	6.00-8.00

### SOLVENT RESISTANCE (On 1-5 Grey wool scale)

Water	Alkali	Acid	Ethyl Acetate	Xylene	MEK	IPA
3	1	3	4	3	3	3

### STANDARD PACKAGING

20 Kg Plastic Bag	42"x42" inch Wooden pallet contains 300 Kg Material.
-------------------	--

**DISCLAIMER:** The colour panels and other information provided in the shade card are given in good faith and are to be used as a guide only. Verification under actual conditions is recommended before use.