

## ANURANG<sup>®</sup> Fast Orange O 341

### PRODUCTION INFORMATION

**ANURANG<sup>®</sup> Fast Orange O 341** is transparent pyrazolone based pigment. It exhibits high colour strength, gloss and good solvent resistance properties.

### PRODUCT INFORMATION



<b>Chemical Type</b>	Dis Azo Pyrazolone
<b>C.I.Name</b>	Pigment Orange 34
<b>C.I. No</b>	21115
<b>CAS NO</b>	15793-73-4
<b>EINECS /ELINCS No</b>	239-898-6
<b>PHYSICAL FORM</b>	Free Flowing Powder

### APPLICATION PROFILE


Water borne Paints	Recommended
Air Drying Alkyds	Recommended
Aqueous Pigment Emulsion	Recommended
Stoving Enamels	-
Powder Coating	Recommended
Industrial Coating	-
Coil Coating	-

### COLOURESTICES / FASTNESS PROPERTIES

### TECHNICAL DATA

FULL TONE (0.2 % )		Reduction Tone ( 1: 20)	
			
L	56.92	L	73.53
C	76.95	C	54.32
H	44.87	H	46.56
a	54.54	a	37.35
b	54.29	b	39.45
Light Fastness	5-6	Light Fastness	4-5
Weather Fastness	3-4	Weather Fastness	2-3

### CHEMICAL STRUCTURE

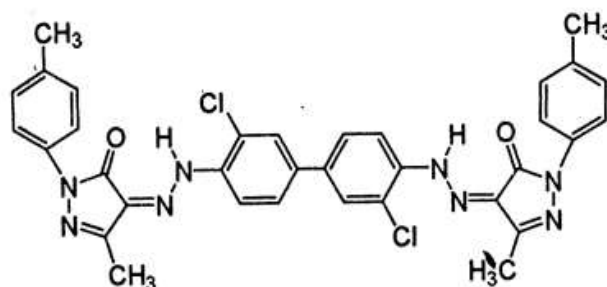

### PHYSICAL DATA

Oil Absorption	gm/100gm	45.0-55.0
Bulk Density	Kg/Lt	0.25-0.30
Specific Gravity	Gm/cm <sup>3</sup>	1.20-1.50
pH	Number	6.00-7.00

### SOLVENT RESISTANCE (On 1-5 Grey wool scale)

Water	Alkali	Acid	Ethyl Acetate	Xylene	MEK	IPA
5	5	5	3	3	2	2

### STANDARD PACKAGING

20 Kg Plastic Bag	42"x42" inch Wooden pallet contains 300 Kg Material.
-------------------	--

**DISCLAIMER:** The colour panels and other information provided in the shade card are given in good faith and are to be used as a guide only. Verification under actual conditions is recommended before use.