

## ANURANG Rubine Toner R 571

### PRODUCTION INFORMATION

**ANURANG® Fast Rubine Toner R 571** is bluish red shade Rubine toner especially designed for Air drying Paints and industrial coating segment.

### PRODUCT INFORMATION

<b>Chemical Type</b>	Mono Azo Rubine
<b>C.I.Name</b>	Pigment Red 57:1
<b>C.I. No</b>	15850:1
<b>CAS NO</b>	5281-04-9
<b>EINECS /ELINCS No</b>	226-109-5
<b>PHYSICAL FORM</b>	Free Flowing Powder

### APPLICATION PROFILE

Water borne Paints	-
Air Drying Alkyds	Recommended
Aqueous Pigment Emulsion	-
Stoving Enamels	Recommended
Powder Coating	Recommended
Industrial Coating	Recommended
Coil Coating	-


### COLOURESTICES / FASTNESS PROPERTIES

### TECHNICAL DATA

FULL TONE (0.2 % )		Reduction Tone ( 1: 20)	
			
L	33.45	L	52.64
C	40.00	C	48.73
H	29.32	H	355.61
a	34.88	a	48.59
b	19.59	b	-03.73
Light Fastness	4-5	Light Fastness	2-3
Weather Fastness	2-3	Weather Fastness	1-2

### CHEMICAL STRUCTURE

Calcium Salt of -

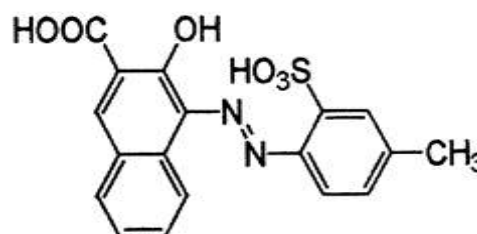

### PHYSICAL DATA

Oil Absorption	gm/100gm	45.0-65.0
Bulk Density	Kg/Lt	0.20-0.30
Specific Gravity	Gm/cm <sup>3</sup>	1.45-1.70
pH	Number	6.00-8.00

### SOLVENT RESISTANCE (On 1-5 Grey wool scale)

Water	Alkali	Acid	Ethyl Acetate	Xylene	MEK	IPA
5	2	2	3	4	4	3

### STANDARD PACKAGING

20 Kg Plastic Bag      42"x42" inch Wooden pallet contains 300 Kg Material.

**DISCLAIMER:** The colour panels and other information provided in the shade card is given in good faith and is to be used as a guide only. Verification under actual conditions is recommended before use.